


Console hydrojack

It is intended for a thrust of the active console and prevention of a collapse of a chest of a face on layers inclined to a stream.

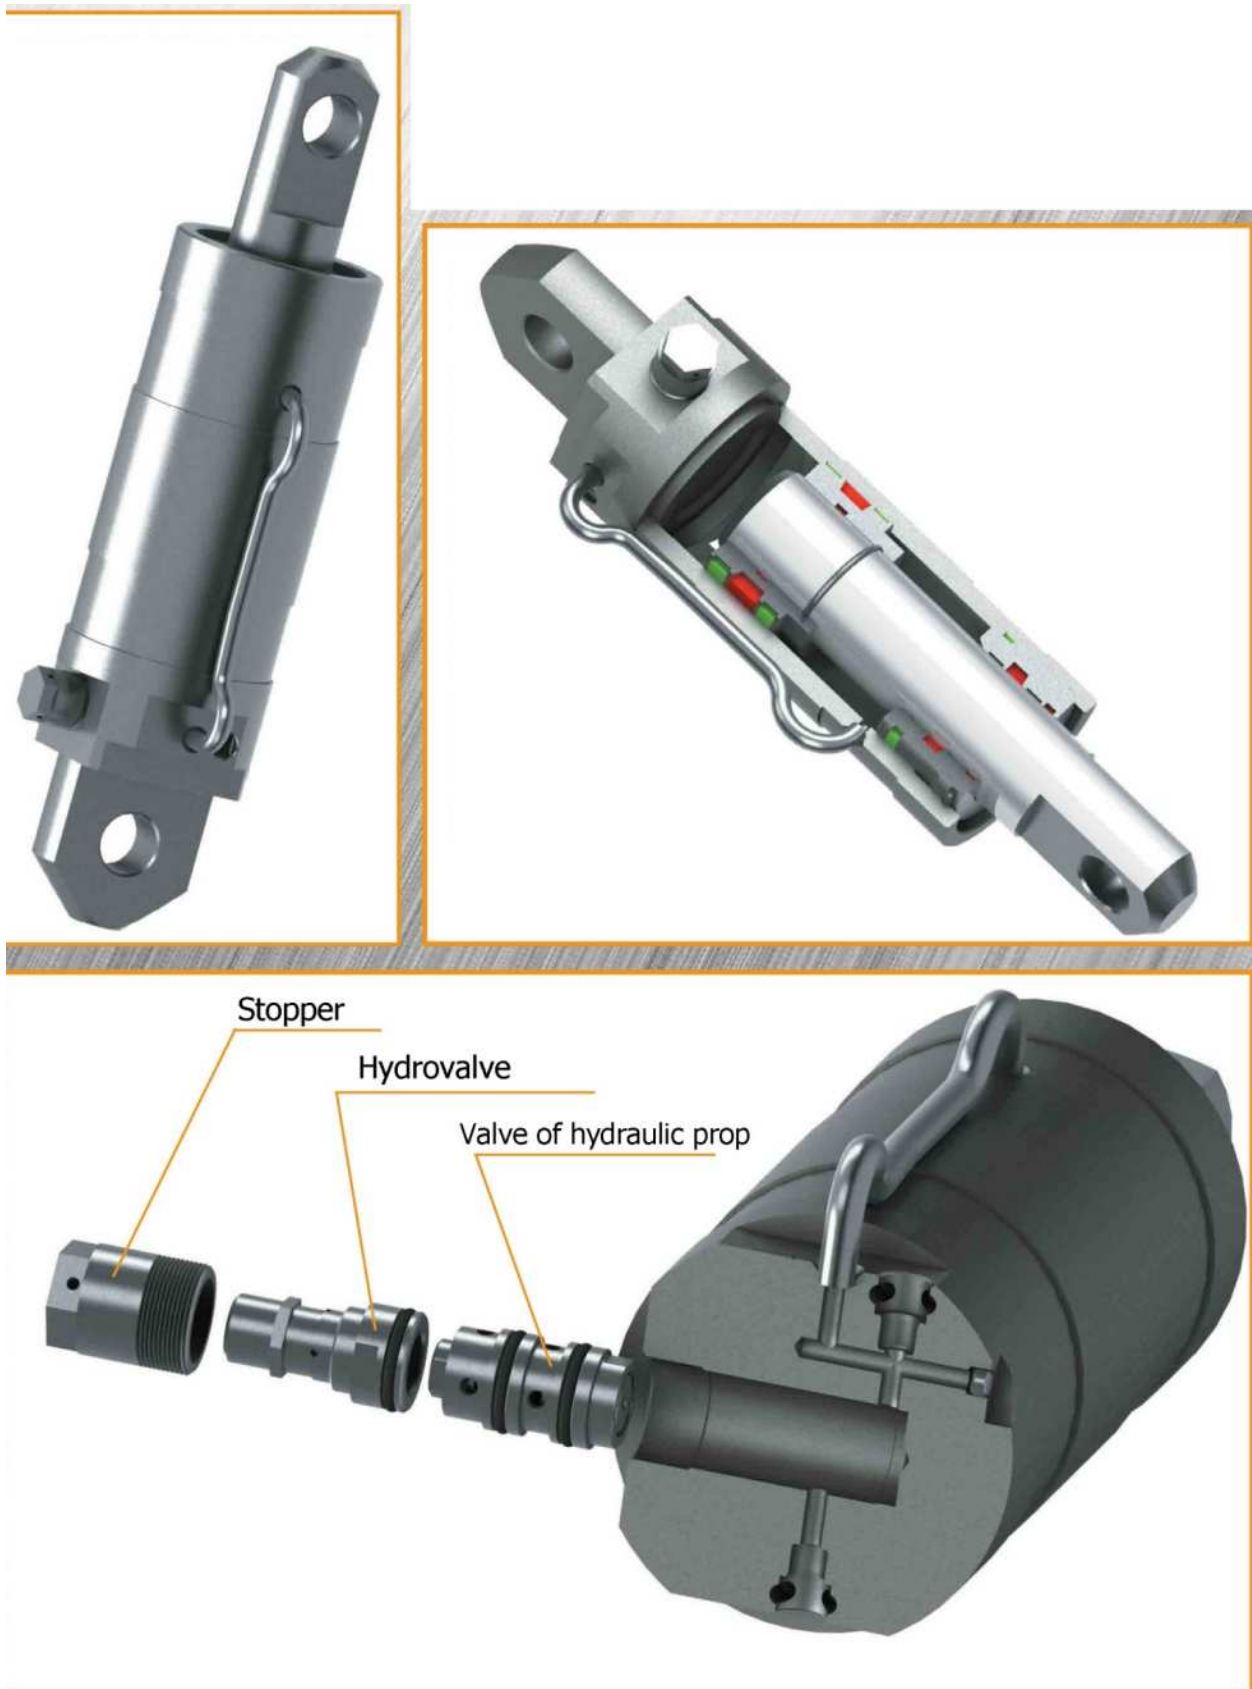



Hydrojack recursors

provides a latch of the conveyor and to a recursor of sections fix on the set distance.



Hydropatron

The hydropatron is used for an extraction of the basis of the section mechanized fix at its recursor without loss of contact with a roof in clearing faces.

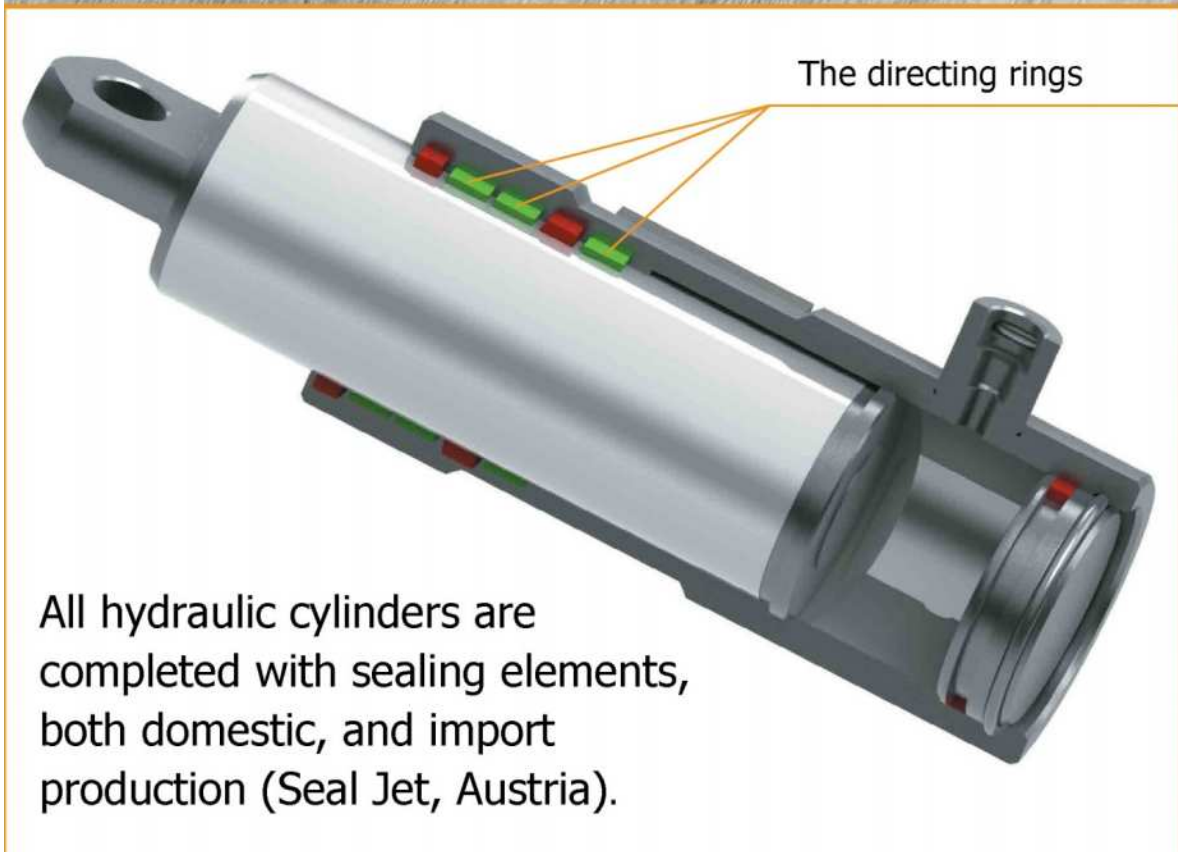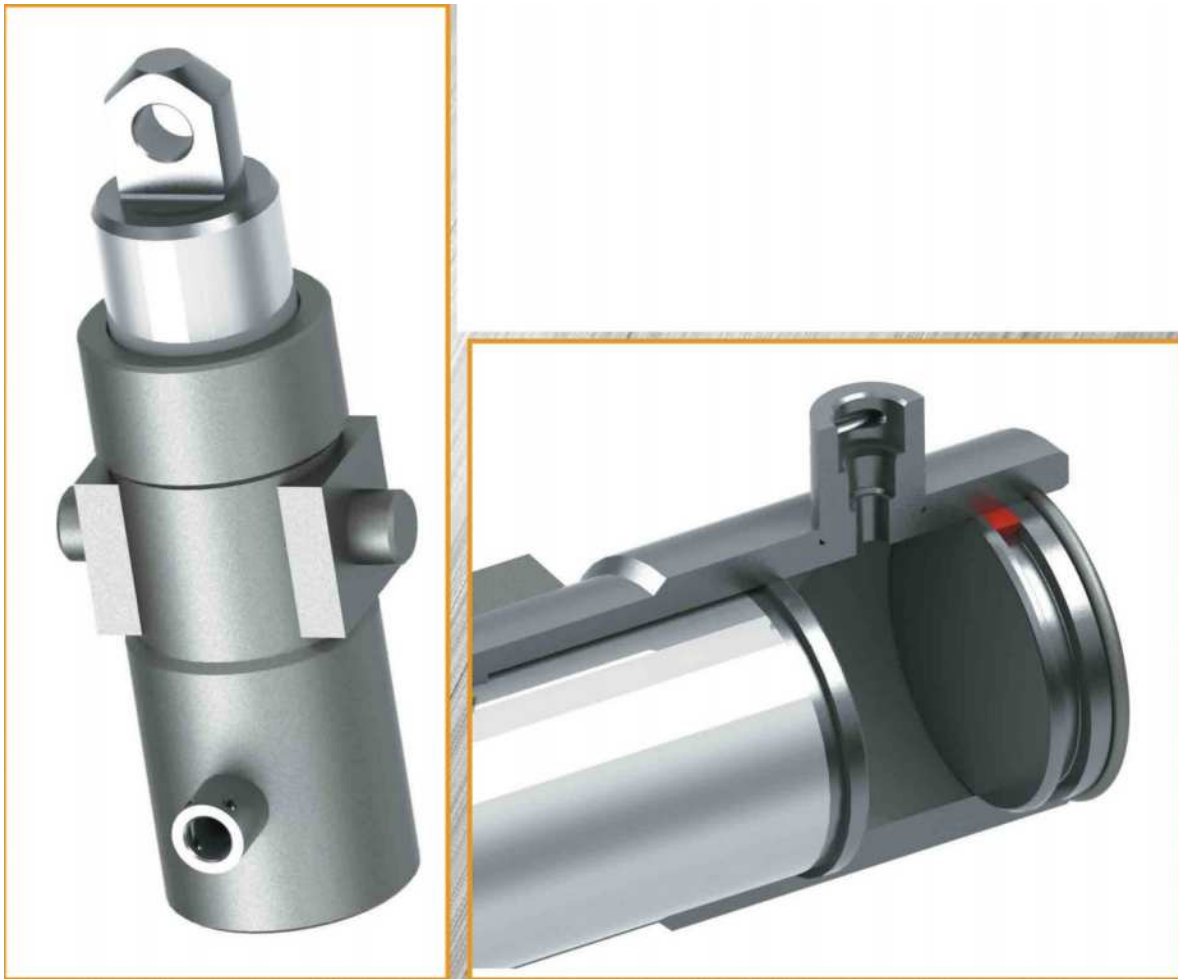

Hydrojack angular



It is intended for stabilization of provision of overlapping of rather back protection.


All details of hydrojacks pass heat treatment: normalization, hardening of a blanket; on stocks - in addition currents of high frequency, superficial training.

Each product passes test on control test bench.



Rack


It - carries out function of a basic element which perceives pressure of breeds of a roof from overlappings and transmits it with a certain resistance through the bases of section fix on the soil of layer.

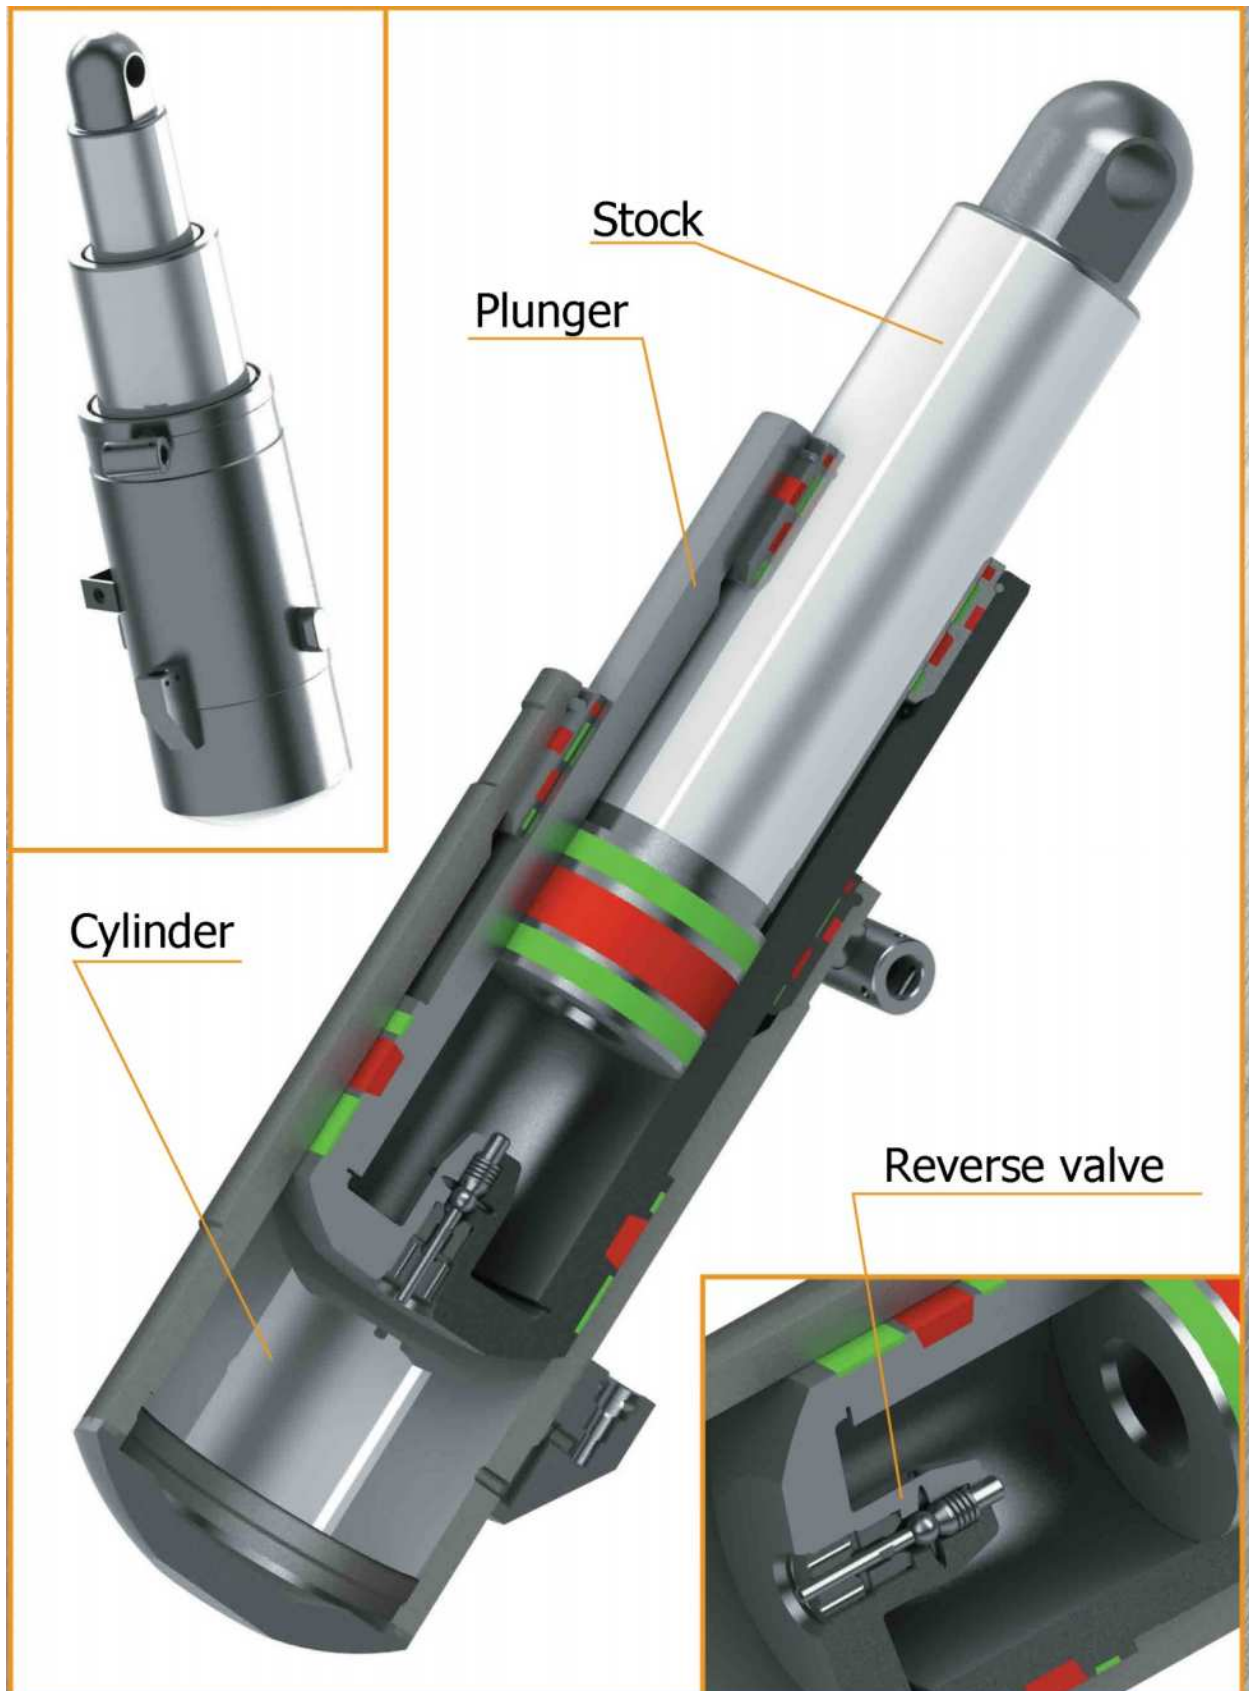

Hydrojack lateral



Working liquid of hydraulic cylinders are any water oil emulsions and industrial oils allowed for application in coal mines with a purity class not lower than 15 in accordance with GOST 17216.

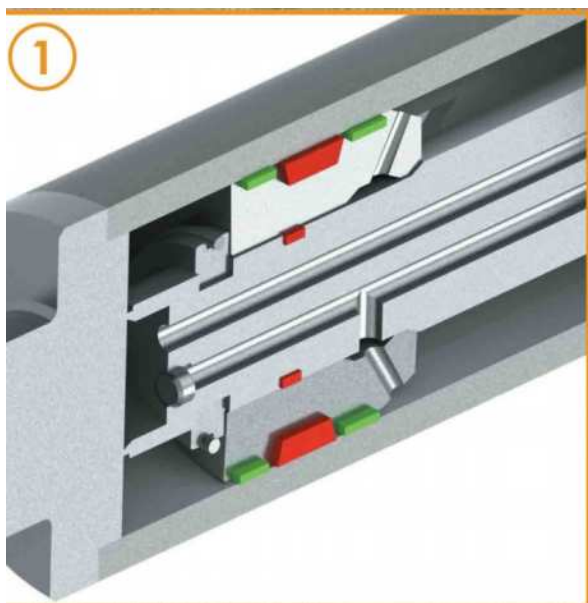

For increase of corrosion resistance and service life of a product, surfaces of stocks have the chromeplated covering


Stabilization hydrojack

It is applied to ensuring stability of overlapping of section fix in relation to a back protection and the basis of section, in need of change of their situation.




Hydrojack konveer's recursors

It is applied for recursors of the scraper conveyor in clearing faces from an individual fix.

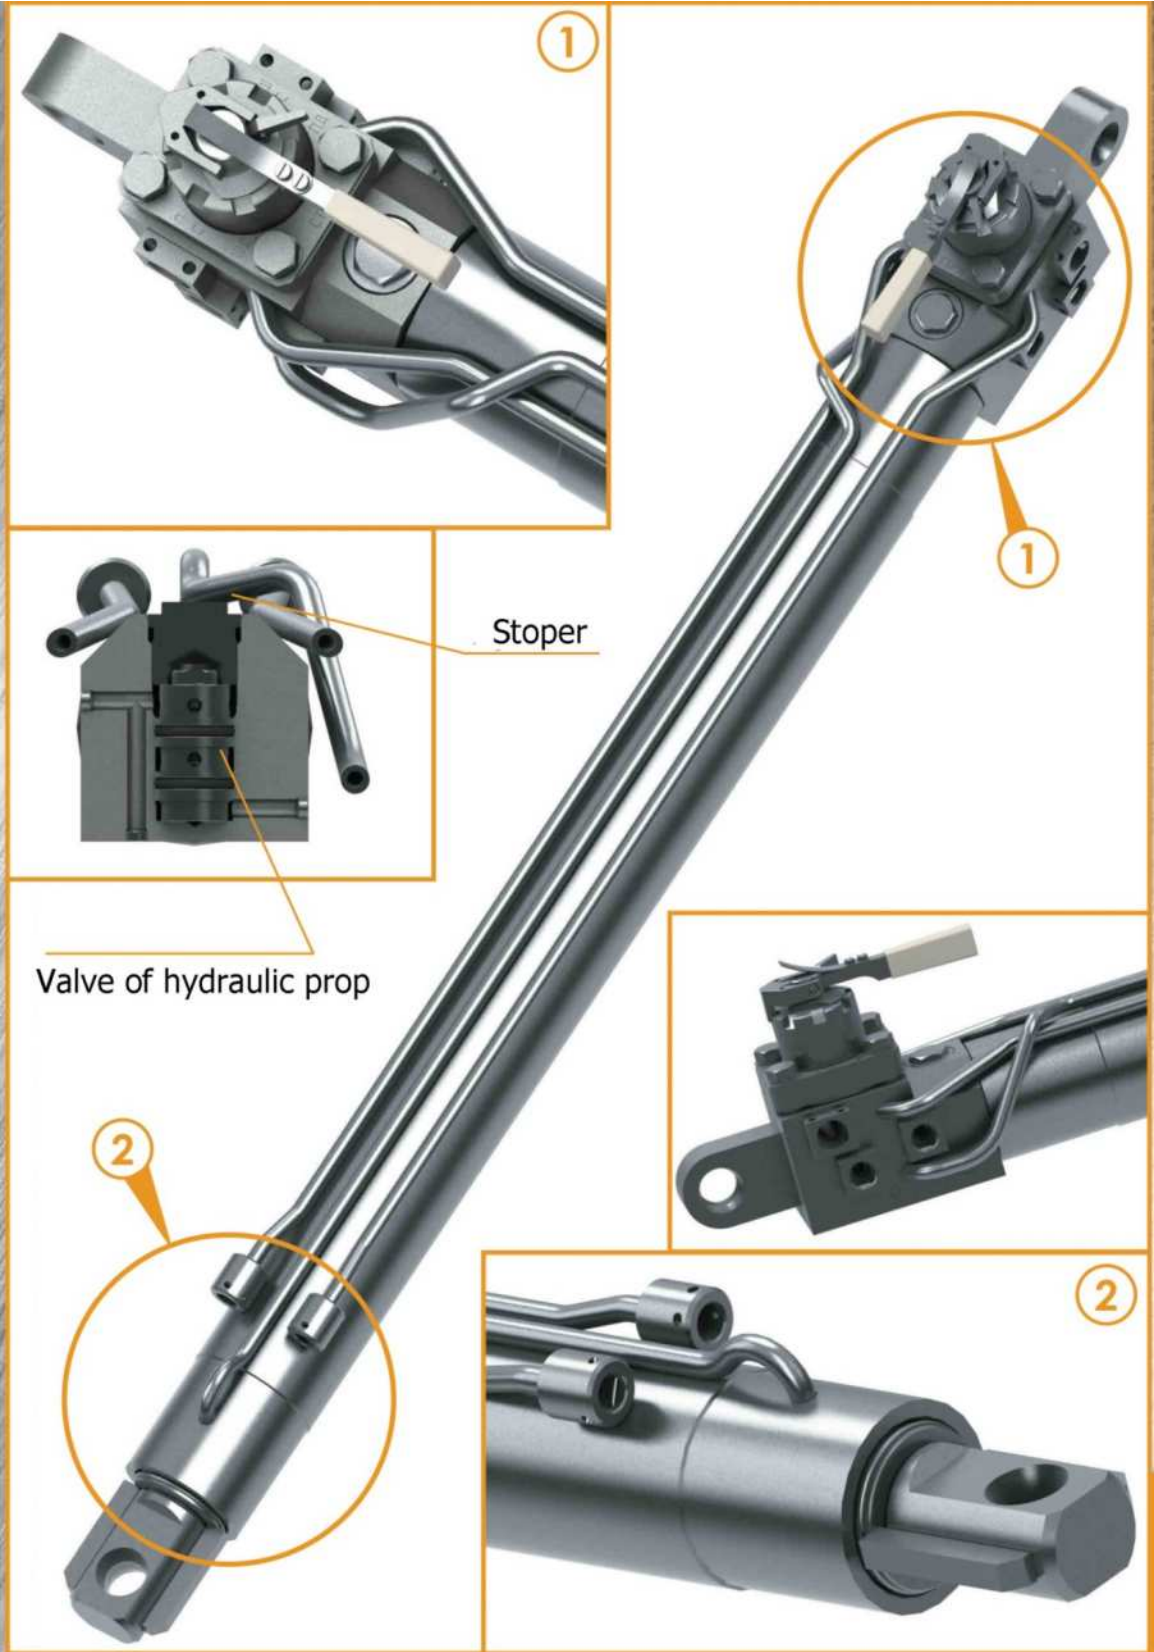


For ensuring function of movement of the scraper conveyor loading crane hydraulic devices recursors of the pulling type are used.

Our enterprise successfully makes accessories for a hydroadvancer.

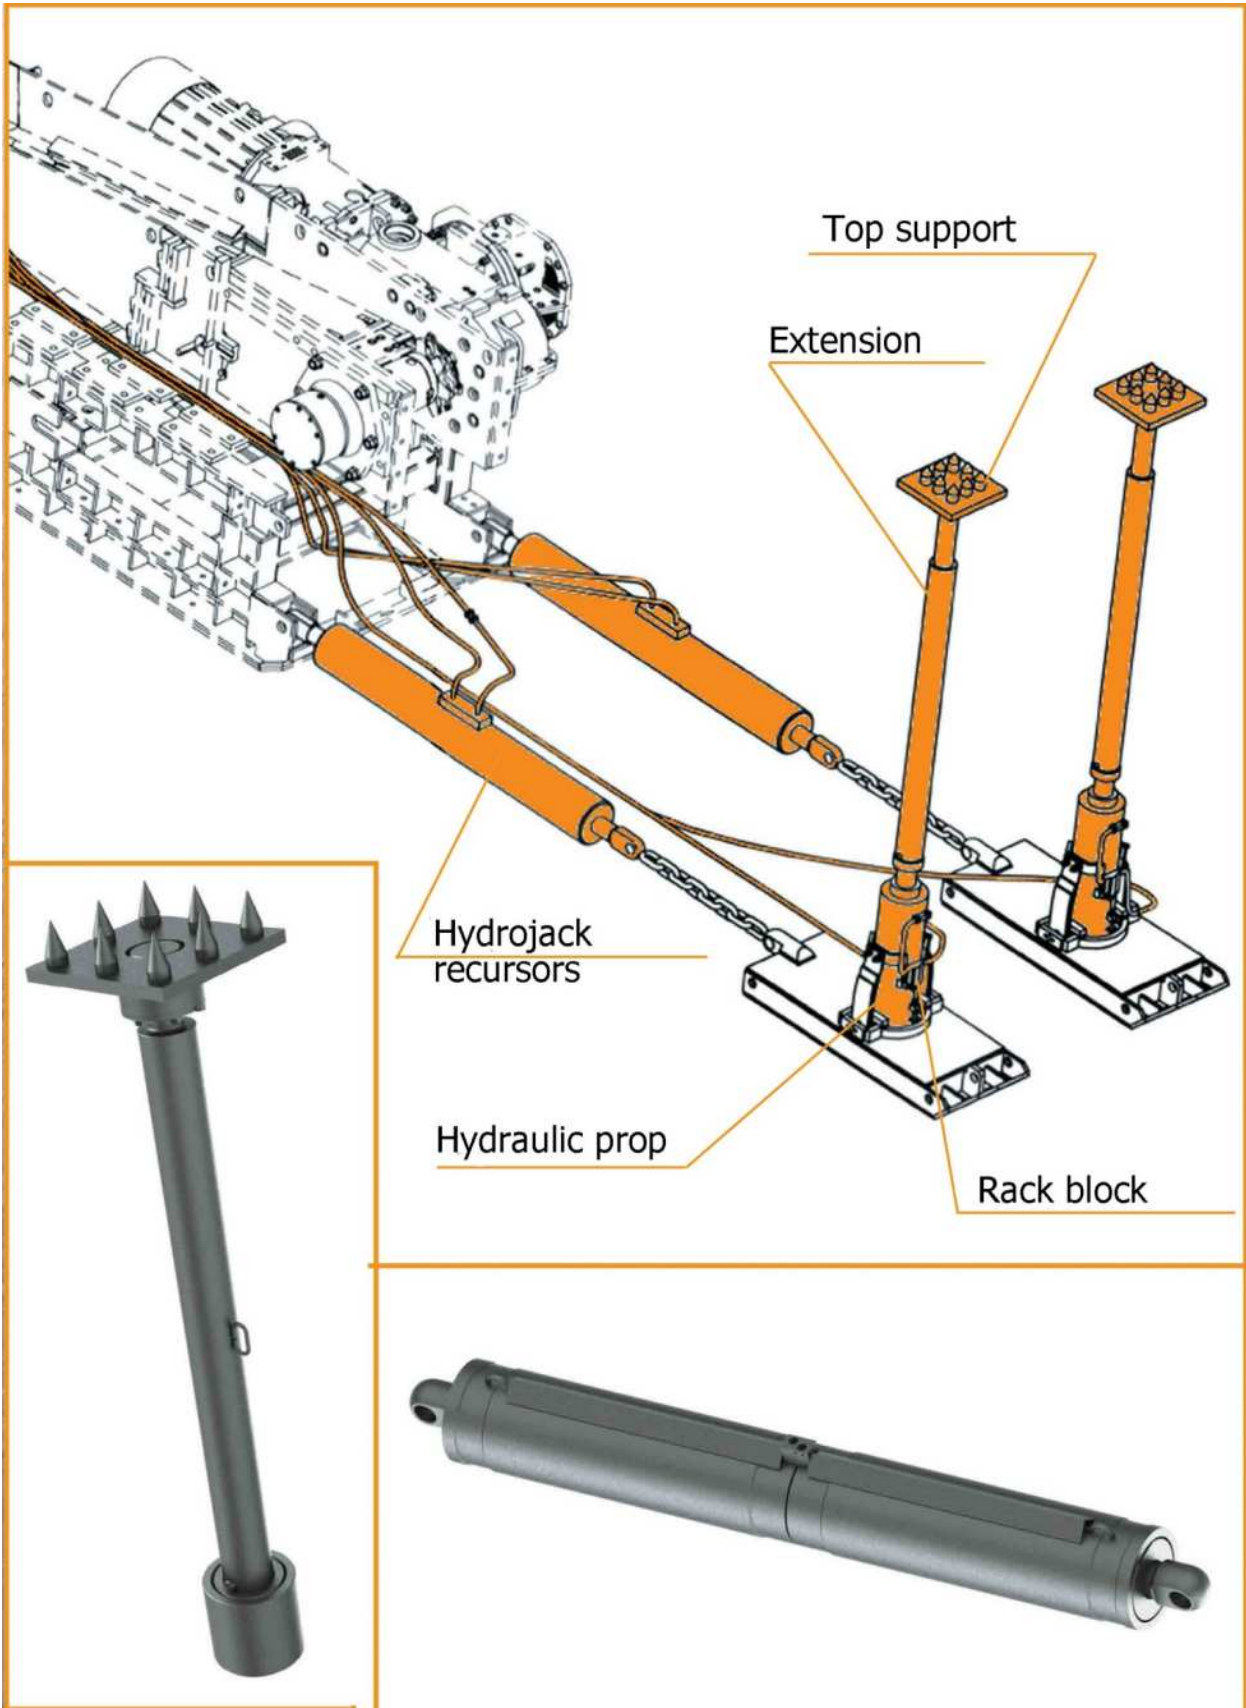

Hydrojack recursors

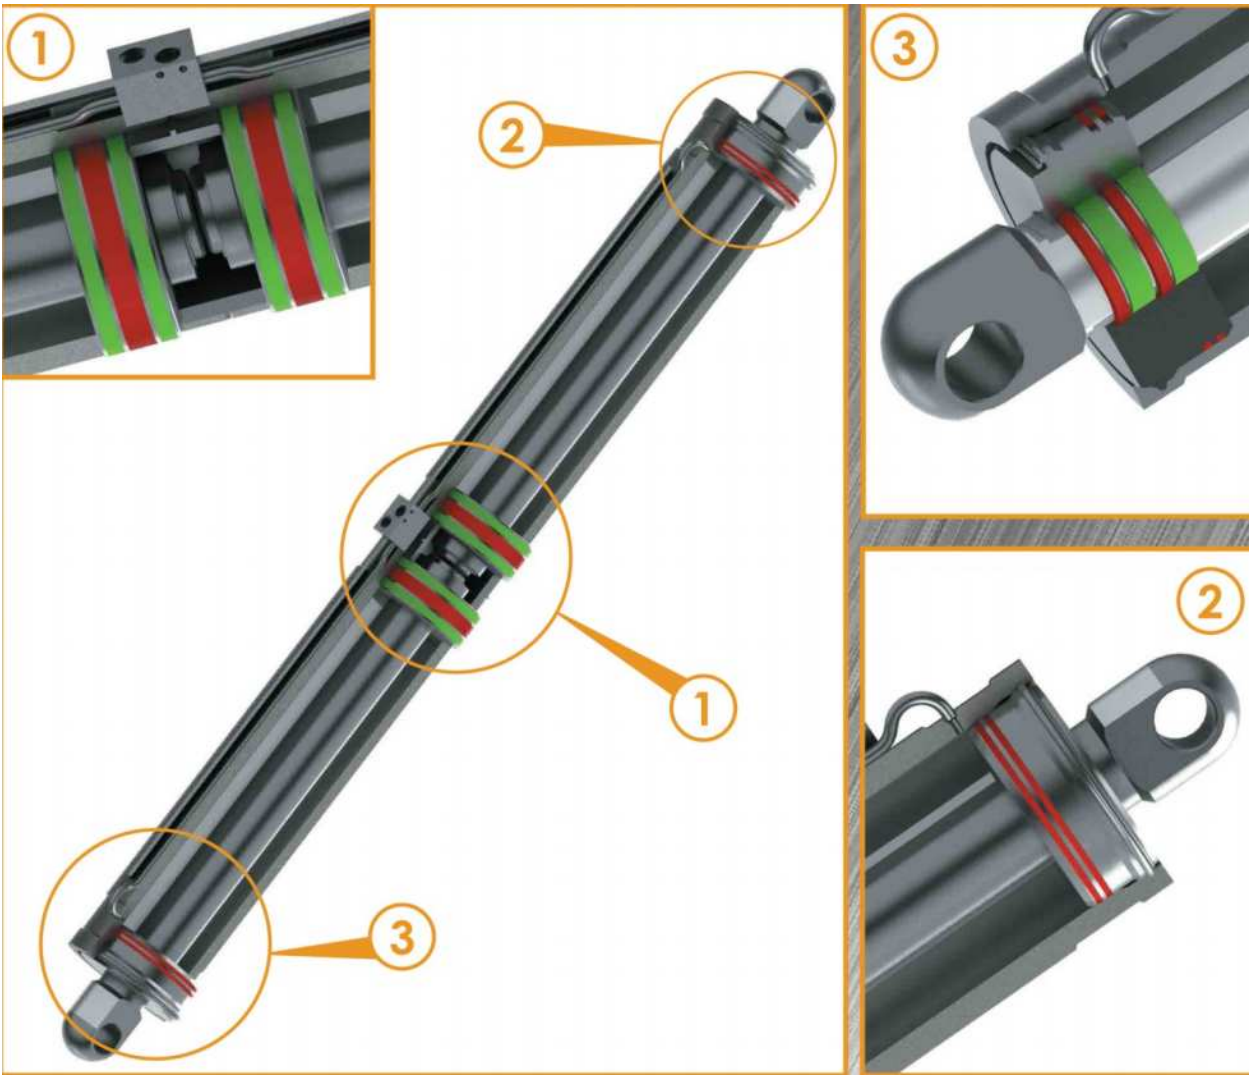

Support top with an extension

